

BEST AVAILABLE COPY



The  
Patent  
Office

PCT/EP

99/04756



B. Dampier  
4/7-01

REC'D 26 AUG 1999

WIPO PCT

EPO - DG 1

INVESTOR IN PEOPLE

EP 99/04734

16. 08. 1999

(86)

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

ESU

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

G D Court


25 JUN 1999

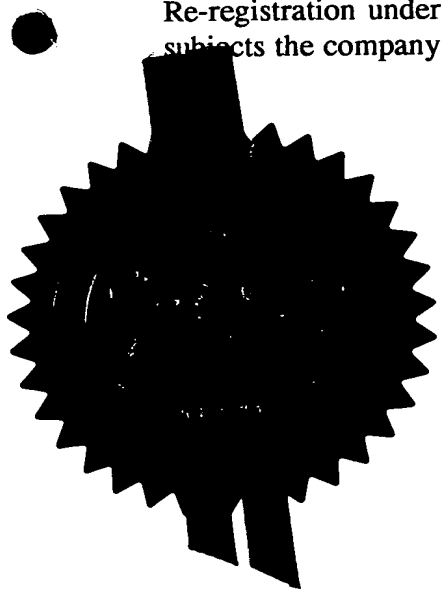

**THIS PAGE BLANK (USPTO)**

**BEST AVAILABLE COPY**

for official use



11 JUL 1998

13JUL98 E374983-1 D02319  
P01/7700 25.00 - 9815025.3

our reference

9815025.3

GE30513P/GBRI/O'NEILL/RPJ/VC

tes  
ase type, or write in dark ink  
ing CAPITAL letters. A  
scribed fee is payable for a  
quest for grant of a patent.  
details, please contact the  
ent Office (telephone  
1-438 4700).

16 of the Patents Rules 1990  
he main rule governing the  
mpletion and filing of this form.

Do not give trading styles, for  
example, 'Trading as XYZ company',  
nationality or former names, for  
example, 'formerly (known as) ABC  
Ltd' as these are not required.

**Warning**  
After an application for a Patent has  
been filed, the Comptroller of the  
Patent Office will consider whether  
publication or communication of the  
invention should be prohibited or  
restricted under Section 22 of the  
Patents Act 1977 and will inform the  
applicant if such prohibition or  
restriction is necessary. Applicants  
resident in the United Kingdom are  
so reminded that under Section 23,  
applications may not be filed abroad  
without written permission unless an  
application has been filed not less  
than 6 weeks previously in the United  
Kingdom for a patent for the same  
invention and either no direction  
prohibiting publication or  
communication has been given, or  
any such direction revoked.

**The Patent Office**  
**Request for grant of a Patent**  
**Form 1/77**  
Patents Act 1977

**1 Title of invention**

- 1 Please give the title of the invention
- COMMUNICATION SYSTEM WITH REDUCED POWER VARIATION AND METHOD THEREFOR

**2 Applicant's details**

☐ First or only applicant

- 2a If you are applying as a corporate body please give:

Corporate name

MOTOROLA LTD

Country (and State of incorporation, if appropriate)

United Kingdom

- 2b If you are applying as an individual or one of a partnership please give in full:

Surname

Forenames

- 2c In all cases, please give the following details:

Address

Jays Close  
Viabes Industrial Estate  
Basingstoke  
Hampshire RG22 4PD  
England

UK postcode (if applicable)

Country

ADP number (if known)

United Kingdom

11800002

d, 2e and 2f: If there are further  
cants please provide details on a  
separate sheet of paper.

**Second applicant (if any)**

2d If you are applying as a corporate body please give:

Corporate name

Country (and State  
of incorporation, if  
appropriate)

2e If you are applying as an individual or one of a partnership please give in full:

Surname

Forenames

2f In all cases, please give the following details:

Address

UK postcode  
(if applicable)

Country

ADP number  
(if known)

④ An address for service in the  
United Kingdom must be supplied

Please mark correct box

**④ Address for service details**

3a Have you appointed an agent to deal with your application?

Yes ☒ No ☐ → go to 3b

↓  
please give details below

Agent's name

Agent's address

SARAH GIBSON

MOTOROLA, EUROPEAN  
INTELLECTUAL

PROPERTY OPERATIONS

MIDPOINT, ALENCON LINK

BASINGSTOKE, HAMPSHIRE

Postcode

Agent's ADP  
number

RG21 7PL

727 2289001

you have appointed an agent, all  
correspondence concerning your  
cation will be sent to the agent's  
United Kingdom address.

3b If you have not appointed an agent please give a name and address in the  
United Kingdom to which all correspondence will be sent:

Name

Address

Daytime telephone  
number (if available)

Postcode

ADP number  
(if known)

CE30513P/GBRI/O'NEILL/RPJ/VC

Please mark correct box

⑤ Claiming an earlier application date

5 Are you claiming that this application be treated as having been filed on the date of filing of an earlier application?

Yes ☐ No ☒ → go to 6

↓  
please give details below

□ number of earlier application or patent number

☐ filing date

day month year

☐ and the Section of the Patents Act 1977 under which you are claiming:

15(4) (Divisional) ☐ 8(3) ☐ 12(6) ☒ 37(4) ☐

Please mark correct box

you are declaring priority from a foreign application please enter "PCT" as the country and enter the country (for example, GB) as part of the application number.

we give the date in full number  
mat, for example, 31/05/90 for  
31 May 1990.

### ⑥ Declaration of priority

6 If you are declaring priority from previous application(s), please give:

Country of filing	Priority application number (if known)	Filing date (day, month, year)
-------------------	---	-----------------------------------

Country of filing	Priority application number (if known)	Filing date (day, month, year)

The answer must be "No" if:  
any applicant is not an inventor  
or is an inventor who is not an  
applicant, or  
applicant is a corporate body.

## 7 Inventorship

7 Are you (the applicant or applicants) the sole inventor or the joint inventors?

Please mark correct box

Yes ☐

No ☒

A Statement of Inventorship on Patents  
Form 7/77 will need to be filed (see Rule 15).

3 Please supply duplicates of:  
n(s), abstract, description and  
drawing(s).

## 8 Checklist

8a Please fill in the number of sheets for each of the following types of  
document contained in this application.

Continuation sheets for this Patents Form 1/77

—

Claim(s)

5

Description

15

Abstract

1

Drawing(s)

9

8b Which of the following documents also accompanies the application?

Priority documents (please state how many)

—

Translation(s) of Priority documents (please state how many)

—

Patents Form 7/77 – Statement of Inventorship and Right to Grant  
(please state how many)

2

Patents Form 9/77 – Preliminary Examination/Search

X

Patents Form 10/77 – Request for Substantive Examination

—

Please mark correct box(es)

4 or your appointed agent (see  
90 of the Patents Rules 1990)  
must sign this request.

## 9 Request

We request the grant of a patent on the basis of this application.

*Sarah Gibson*

Signed

Date

SARAH GIBSON

day month / year

Please sign here

A completed fee sheet should  
preferably accompany the fee.

Please return the completed form, attachments and duplicates  
where requested, together with the prescribed fee to either:

☐ The Comptroller  
The Patent Office  
Cardiff Road  
Newport  
Gwent  
NP9 1RH

or

☐ The Comptroller  
The Patent Office  
25 Southampton Buildings  
London  
WC2A 1AY

# COMMUNICATION SYSTEM WITH REDUCED POWER VARIATION AND METHOD THEREFOR

## Field of the Invention

5

The present invention relates to a communication system with reduced power variation wherein data from a transmitter is transmitted to a receiver over a plurality of subchannels and a method therefor. The invention is applicable but not limited to a cellular communication system.

10

## Background of the Invention

15 In a cellular communication system each of the mobile stations communicate with typically a fixed base station. Communication from the mobile station to the base station is known as uplink and communication from the base station to the mobile station is known as downlink. The total coverage area of the system is divided into a number of separate cells each covered by a single base station. The cells are typically geographically  
20 distinct with an overlapping coverage area with neighbouring cells. As a mobile station moves from the coverage area of one cell to the coverage area of another cell, the communication link will change from being between the mobile station and the base station of the first cell to being between the mobile station and the base station of the second cell. This is known as a  
25 handover. Specifically, some cells may lie completely within the coverage of other larger cells.

All base stations are interconnected by a fixed network. This fixed network comprises communication lines, switches, interfaces to other  
30 communication networks and various controllers required for operating the network. A call from a mobile station is routed through the fixed network to the destination specific for this call. If the call is between two mobile stations of the same communication system the call will be routed through the fixed network to the base station of the cell in which the other mobile station  
35 currently is. A connection is thus established between the two serving cells

through the fixed network. Alternatively, if the call is between a mobile station and a telephone connected to the Public Switched Telephone Network (PSTN) the call is routed from the serving base station to the interface between the cellular mobile communication system and the PSTN. It is then  
5 routed from the interface to the telephone by the PSTN.

Many different modulation methods are known for communication in cellular and other communication schemes. Some of these involve the transmission of data from a transmitter to a receiver over a plurality of  
10 distinct subchannels. Examples of this include Orthogonal Frequency Division Multiplex (OFDM) or multicode Code Division Multiple Access (CDMA) schemes. A common characteristic of these modulation schemes is that the transmitted power varies substantially dependent on the data in the subchannels resulting in a high peak to average ratio of the transmitted  
15 power.

In order to limit degradation and spectral spreading of the transmission, a high peak to average ratio of the transmit power requires that the output power amplifier has to be linear over a wide dynamic range. This  
20 significantly impairs the cost and efficiency of the power amplifier. This is especially a problem in mobile communication systems where a low efficiency of the output amplifier significantly reduces the battery life of the mobile station.

25 Substantial benefits can thus be obtained by reducing the variations of the transmit power.

### Summary of the Invention

30

The invention seeks to provide a system for reducing the peak to average of transmissions in a communication system using a subchannel modulation scheme.



According to a first aspect of the invention, there is provided a communication system with reduced power variation wherein data is transmitted over a plurality of subchannels comprising at least one means of generating information symbols, a subchannel transmitter for  
5 transmission of channel symbols on individual subchannels in a combined signal, at least one encoder for encoding information symbols into higher order channel symbols at substantially the same symbol rate, the encoding both being in response to a forward error correction scheme and including selection between redundant symbol values to reduce power variation of the  
10 combined signal, and a subchannel receiver receiving the higher order channel symbols and regenerating the information symbols.

Preferably, the average symbol energy of the channel symbols is substantially the same as the information symbols and the encoding of  
15 information symbols into higher order channel symbols is done independently for each subchannel.

According to a preferred feature of the invention the forward error correcting scheme is a trellis coding scheme.

20

According to a second preferred feature of the invention, the encoder comprises a first data input for the information symbols and at least a second data input for compensation data, the communication system further comprising means for generating compensation data reducing the  
25 amplitude variations of the combined signal.

Preferably, the communication scheme employed is an Orthogonal Frequency Division Multiplex (OFDM) subchannel communication scheme or a multicode Code Division Multiple Access (CDMA) subchannel  
30 communication scheme.

According to a second aspect of the invention, there is provided a method of reducing power variation in a communication system wherein data is transmitted over a plurality of subchannels, the method comprising

generating information symbols, transmitting channel symbols on individual subchannels in a combined signal, encoding information symbols into higher order channel symbols at substantially the same symbol rate, the encoding both being in response to a forward error correction scheme and including selection between redundant symbol values to reduce power variation of the combined signal, and receiving the higher order channel symbols and regenerating the information symbols.

The invention thus enables a reduction in the power variation of a subchannel transmitter without degrading performance or increasing transmission bandwidth by increasing the order of the channel symbols, introducing forward error correction coding and selecting between redundant symbol values so that power variation is minimised.

15

### **Brief Description of the Drawings**

An embodiment of the present invention is described below, by way of example only, with reference to the accompanying drawing, in which:

20

FIG. 1 is an illustration of a cellular communication system according to prior art.

FIG. 2 is a block diagram of an example of a single communication link between one mobile station and one base station using a subchannel modulation scheme using conventional means.

25

FIG. 3 is a block diagram of a conventional 4 subchannel transmitter using an OFDM modulation scheme .

30

FIG. 4 is a block diagram of a conventional OFDM subchannel receiver 400 for four subchannels.

FIG. 5 is a block diagram of conventional 2 channel subchannel transmitter using a multicode CDMA subchannel modulation scheme.

FIG. 6 is a block diagram of a conventional multicode CDMA 2 channel subchannel receiver.

FIG. 7 is an illustration of the possible constellation points for a QPSK symbol and of a short section of the spreading codes for the two subchannels.

FIG. 8 is a block diagram of a 4 channel OFDM subchannel transmitter in accordance to the invention.

FIG. 9 is an illustration of the constellation points for a BPSK symbol and an 8-PSK symbol.

FIG. 10 is an illustration of an example of a trellis coder.

## **Description of a Preferred Embodiment**

FIG. 1 illustrates a cellular communication system 100. In the system, a base station 101 communicates with a number of mobile station 103 over radio channels 105. In the cellular system, the base station 101 covers users within a certain geographical area 107 whereas other geographical areas 109, 111 are covered by other base stations 113, 115. Typically, each of the base stations 101, 113, 115 contain a broadcast carrier plus one or more traffic carriers.

FIG. 2 illustrates an example of a link between one mobile station 103 and one base station 101 using a subchannel modulation scheme. In the example, the data from a single data source 201 is separated into subchannels in a serial to parallel converter 203. Alternatively, the data on different subchannels may originate from different data sources. The serial

to parallel converter 203 is connected to a subchannel transmitter 205 which modulates the data , amplifies and transmits the modulated signal over the radio channel 209 by use of an antenna 207. The signal is received by a receive antenna 211 connected to a subchannel receiver 213 which  
 5 regenerates the data transmitted on each individual subchannel. In the example, the data received in the subchannels are combined into a single data stream by a parallel to serial converter 215.

FIG. 3 illustrates the principle of a 4 subchannel transmitter 300 using an  
 10 OFDM modulation scheme. The data in each subchannel is fed to a symbol mapper 301-307 which maps the data into a complex symbol for transmission on the subchannel. The complex symbols are fed to the OFDM modulator 309 which generates an OFDM modulated signal  $s(t)$  given by

$$15 \quad s(t) = \sum_{i=-\infty}^{\infty} \sum_{k=0}^3 \text{Re} \left[ d_{i,k} \cdot e^{j2\pi f_k t} \right] \cdot \text{rect} \left( \frac{t - iT - T/2}{T} \right)$$

where  $d_{i,k}$  is data symbol  $i$  on subchannel  $k$ ,  $f_k$  the modulation frequency of subchannel  $k$  given by  $f_k = k \cdot f_0$  where  $f_0$  is the frequency of the subchannel with the lowest frequency.  $\text{Re}(x)$  denotes the real part of  $x$  and  $\text{rect}(x)$  is  
 20 given by

$$\text{Rect}(x) = \begin{cases} 1 & 0 \leq x < 1 \\ 0 & \text{Otherwise} \end{cases}$$

The individual subchannels carrying the subchannel information is thus  
 25 combined into a combined signal by the OFDM modulator. The combined signal is frequency shifted to the carrier frequency in a multiplier (or mixer) 311 and fed to the antenna 207 through an amplifier 313.

FIG. 4 illustrates the principle of an OFDM subchannel receiver 400 for four  
 30 subchannels. The signal from the receive antenna 211 is fed to a low noise amplifier 401 and the amplified signal is fed to a multiplier (or mixer) 403 down converting the signal to complex base band. The down-converted

signal is fed to four complex multipliers and the output signal of each multiplier is fed to an integrator 413-419. The output signal on subchannel k is thus given by

$$r_k(t) = \int_{iT}^{(i+1)T} r(t) \cdot e^{-2\pi f_k t} dt$$

where  $r(t)$  is the down-converted received base band signal. In each subchannel the integration over a symbol period will result in the signals from other subchannels cancelling out whereas the signal in the current subchannel is restored to an integration of the basic pulse shape, in this case given by the  $\text{rect}(x)$  function. The output of the integrators are fed to data detectors 421 - 427 which estimates the received symbol and maps it into the received data in the subchannel.

A more detailed description of OFDM modulation can be found in 'COFDM modulation: an overview' by W.Y.Zou and Y.Wu in IEEE Transactions on Broadcasting Vol. 41 No.1 pp 1-8, March 1995.

FIG. 5 illustrates an example of a 2 channel subchannel transmitter 500 using a multicode CDMA subchannel modulation scheme. The input data in the two subchannels are mapped into complex symbols by the symbol mappers 501, 503. The complex symbols are multiplied by a first spreading code in multipliers 505, 507. The first spreading code is different for each subchannel and preferably the spreading codes are orthogonal between the channels. The two channels are added together in an adder 509 and the sum is in this example spread by multiplication in a second multiplier 511 by a common spreading code. The output of the multiplier is fed to a quadrature modulator 513 and the resultant signal is amplified in an amplifier 515 before being transmitted by the antenna 517.

FIG. 6 illustrates the principle of a multicode CDMA 2 channel subchannel receiver 600. The radio signal is received by an antenna 601 and amplified in a low noise amplifier 603. The output of the amplifier 603 is fed to a quadrature down converter which generates complex base band signal.

This signal is de-spread by the common spreading code in a multiplier 607 before being fed to multipliers 609, 611 where the signal is de-spread with the spreading code in each subchannel. The output of the multipliers 609, 611 is fed to symbol time integrators 613,614. The signal for the other  
 5 subchannel will for orthogonal spreading codes integrate to zero whereas the wanted signal following de-spreading will be restored to the non spread signal transmitted in this subchannel. the output of the integrators is fed to data detectors 617,619 which estimates the received symbol and generates the received data in the subchannel.

10

Further description of CDMA communication systems can be found in 'Spread Spectrum CDMA Systems for Wireless Communications' by Savo Glisic and Branka Vucetic, Artech House, 1997, ISBN 0-89006-858-5 and in 'Multi-Carrier Spread Spectrum Modulation with Reduced Dynamic Range'  
 15 by V.Aue and G.P.Fettweis, proceedings of IEEE 46th Vehicular Technology Conference, 1996, p914.

In both OFDM and CDMA subchannel transmitters, the complex symbols transmitted will add up to a signal with varying amplitude as a  
 20 consequence of the relative phase difference between the symbols. An example is given in FIG. 7 for a two channel CDMA transmitter using Quaternary Phase Shift Keying (QPSK).

FIG. 7(a) illustrates the possible constellation points A, B, C, D for a QPSK  
 25 symbol and FIG. 7(b) illustrates an example of a short section of the spreading codes  $S_1$  and  $S_2$  for the two subchannels. Assuming the symbol constellation A is transmitted in both subchannels, the signals will add constructively during time interval  $T_1$  and  $T_3$  resulting in a summed signal corresponding to point E on FIG. 7(a). During time interval  $T_2$  the two  
 30 signals will have opposite phases due to the opposite signs of the spreading codes in this interval and the two signals will cancel out resulting in the constellation point F on FIG. 7(a). The amplitude variation of the transmitted signal is thus from  $2\sqrt{2}$  during time interval  $T_1$  and  $T_3$  to zero during  $T_2$ .

If however symbol A is transmitted in the first subchannel and symbol B is transmitted in the second subchannel, the two channels will add together in point G during  $T_1$  and  $T_3$ , and in point H during interval  $T_2$ . The amplitude of both point G and H is 2 and there is thus no amplitude variation in this case.

A high amplitude or power variation is disadvantageous in a transmitter as it requires a large dynamic range of linearity of the power amplifier. This significantly increases the complexity and cost of the amplifier and reduces the efficiency. Any non-linearity will furthermore distort the transmitted signal and increase the out of band transmission. The problems are enhanced in mobile stations where long battery life and low complexity amplifiers are required.

According to an embodiment of the present invention, the peak to average ratio of the transmit power level is reduced by mapping the information symbols into higher order channel symbols and selecting between redundant symbol values so that the power variation is reduced. In addition, the order of the symbols are increased to allow forward error correcting coding to compensate for reduction in the minimum distance between the symbols.

The term 'information symbols' denotes the data symbols directly corresponding to the source data in the appropriate subchannel before any processing such as forward error correcting coding. 'Channel symbols' denote the symbols actually transmitted over the radio link and thus include any forward error correcting coding etc. A channel symbol being of higher order than an information symbol means that there are more constellation points of the symbol, such as for example a QPSK symbol being of higher order than a BPSK symbol.

The embodiment is described in more detail in the following for the specific example where the data to be transmitted on each subchannel is mapped

into Binary Phase Shift Keying (BPSK) symbols. FIG. 8 illustrates the embodiment for a 4 channel OFDM subchannel transmitter 800 corresponding to the one illustrated in FIG. 3. The symbol mappers 301-307 are in this case specifically BPSK symbol mappers 801-807. The output of the symbol mappers 801-807 are fed to encoders 809-815 which encode the information symbols into channel symbols by increasing the order of the symbols and using the increased redundancy to reduce power variation and include forward error correcting coding.

Preferably, the encoder will map the BPSK signal into 8 point Phase Shift Keying (8 PSK) using 2 bit trellis coding. FIG. 9 illustrates the constellation points for a BPSK symbol (FIG. 9(a)) and an 8-PSK symbol (FIG. 9(b)). FIG. 10 illustrates an example of a trellis coder 1000 which comprises two data inputs 1001, 1003, the second input being fed to a binary multiplier 1005 which together with two delay elements 1007, 1009 generates a third binary value and introduces convolutional encoding. The three binary data values are fed to a data mapper 1011 which maps the data vector into the corresponding constellation point. A more detailed description of trellis coding can be found in 'Trellis-coded Modulation with Redundant Signal Sets Part 1: Introduction' by G. Ungerboeck in IEEE Communications Magazine, February 87 Vol 25 No 2 or in 'Trellis Coding' by Christian Schlegel, IEEE Press 1997, ISBN 0-7803-1052-7.

The BPSK data from the symbol mappers 801-807 are fed to the second data input 1003 of the encoders 809-815. As can be seen from the mapping the data on the first data input 1001 shifts the channel symbol of the subchannel by 180°. By setting the first data input 1001 of each encoder the channel symbols on each subchannel can thus be rotated with respect to each other to reduce the power variation. The first data input 1001 is for each symbol and each encoder thus set to the value which for the current set of symbols across the sub-channels results in the lowest power variation with respect to the average power of the transmission.



The determination of the appropriate compensation data to be applied to the first input 1001 of each encoder is preferably achieved by evaluating the power variation for all possible settings and choosing the one with the lowest variation.

5

According to one embodiment all possible settings of the data compensation vector are evaluated for all possible combinations of the information symbols on the subchannels. This evaluation can be carried out prior to operation and the preferred compensation data can be stored in a memory unit. The memory input will for every symbol be fed the information symbols of all subchannels and will generate the corresponding compensation data which is fed to the first data input 1001 of all encoders.

Due to inter symbol interference the power level variation may not only depend on the channel symbols currently being transmitted but also on previously transmitted symbols. According to an alternative embodiment, the compensation data for the current symbol is determined in response not only to the current symbol but also to other symbols transmitted before or after the current symbol. Specifically, if transmission is of a bursty nature, the data transmitted in the entire burst is preferably considered when determining the compensation data for the information symbols of the burst. Preferably, this is achieved by evaluating the power level variation over the burst for all possible data combinations in the burst and for all possible compensation data combinations prior to operation and the optimum choice of compensation data is stored in a memory unit. During operation the set of data to be transmitted during the burst is fed to the memory unit, and the corresponding set of compensation data is obtained on the output of the memory unit.

When receiving the transmitted signal, the receiver demodulates and decodes the trellis code as is known in the art. However, as the first data input 1001 does not carry any information but is solely used for reducing the power variation of the transmission, the corresponding bit can be ignored in the receiver.

As one channel symbol is generated for each information symbol, the symbol rate and thus bandwidth of the transmission does not increase by the trellis coding and power variation reduction. Furthermore, the energy per  
5 symbol of the information and channel symbols is preferably maintained identical. As the minimum distance between constellation points is reduced, the uncoded symbol error is increased but this is compensated for by the trellis coding. The invention thus provides reduction of the peak to average power ratio without increasing the transmit power or bandwidth of  
10 the transmission.

According to an alternative embodiment the forward error correcting coding is not done independently on each subchannel but is done by applying error correction to the set of data across the subchannels. In this  
15 embodiment the channel symbol in one subchannel will depend on the information symbols in other subchannels and not just on the information symbols in the current subchannel.

In a different embodiment of the invention applicable to a subchannel  
20 CDMA transmitter with QPSK information symbols, the information symbols are encoded into 16 QAM (Quadrature Amplitude Modulation) using Trellis Coding. This results in similar performance as QPSK for the same transmission bandwidth and power, and provides a redundant bit for rotating each channel symbol permitting reduction in power level  
25 variations. This embodiment is suitable for the Universal Mobile Telecommunication System (UMTS) under standardisation by the European Telecommunication Standards Institute (ETSI).

It will be apparent to the person skilled in the art that other error correcting  
30 schemes such as block coding or convolutional coding can be used instead of Trellis Coding.

In addition to the forward error correcting coding introduced in the encoders, conventional forward error correcting coding can be applied to the

data as is well known in the art. As a specific example referring to FIG. 2, a Viterbi coder can be inserted between data source 201 and the serial to parallel converter 203 or can be connected to each subchannel output of the serial to parallel converter 203. At the receive side, a Viterbi decoder will be  
5 inserted at the output of the parallel to serial converter 215 or at each subchannel input to the parallel to serial converter 215 respectively.

According to a different embodiment the compensation data is not simply ignored at the receiver but is demodulated and an estimate of the received  
10 redundant compensation data is derived. This estimate is used for evaluating a transmission quality preferably by evaluating the error probability of the received compensation data. For example, a memory unit containing the pre-calculated compensation data for the current information symbols as used in the transmitter can be included in the  
15 receiver. After demodulation and decoding the received information symbols can be used as input for the memory unit in the receiver which will output the corresponding compensation data. This can be compared to the received compensation data and the difference between the two will indicate the error probability and thus the transmission quality.

20 Each subchannel will typically have a specified transmission format associated with it and this may be predefined or adaptively modified according to the requirements and conditions of the communication system. According to one embodiment of the invention the transmission format is  
25 different on different subchannels. For example, one subchannel may use 8PSK channel symbols for transmission of BPSK information symbols whereas another subchannel may simultaneously employ 16 QAM channel symbols for transmission of QPSK information symbols. Another example is where transmissions only occur on some subchannels whereas other  
30 subchannels have no transmissions. Preferably, the encoding is performed independently on each subchannel in this embodiment.

Alternatively or in addition the power level of the transmissions in each subchannel may be different and the corresponding encoding can vary

accordingly. For example if four subchannels are transmitted at say twice the power level of four other subchannels, the encoding for reduced power variation according to the current invention may be applied to these four subchannels only.

5

The encoding and application of the described technique can be dynamically altered to suit the current needs and conditions. Specifically, in a cellular communication system the transmitted power of a mobile station will vary with the distance between the base station and the mobile station. When the mobile station is far from the base station the transmitted power will be close to the maximum and in order to ensure a high efficiency without distortion of the transmitted signal the power variations must be reduced to a minimum. However, when the mobile station is close to the base station a substantially lower power level is transmitted and the efficiency will not be significantly affected by power variations. At the low power level the power amplifier will furthermore not be close to clipping or non-linear amplification and the distortion is thus reduced significantly.

Accordingly, the technique for reducing power variations may only be applied to mobile stations close to the edges of the cells but not to mobile stations close to the base station and hence transmitting at low power. A more flexible approach is to alter the information and channel symbol transmission rates and thus the encoding algorithm according to the current conditions.

25

The symbol mappers, encoders and the memory unit are preferably implemented in a suitable processor, such as a microprocessor or digital signal processor with associated memory, or is alternatively implemented in an integrated circuit.

30

It will be apparent to the person skilled in the art that the function performed by the symbol mappers, encoders and memory unit can be integrated in a single unit which generates the channel symbols in

response to the data. The single unit may furthermore include the serial to parallel converter.

- 5 The invention is applicable to cellular systems where the invention can be applied to only uplink transmissions, only downlink transmissions or to both uplink and downlink transmissions. It can furthermore be applied throughout the system or can be selectively employed for specific mobile stations or base stations.
- 10 It will be apparent to the person skilled in the art that the invention is not limited to a cellular communication system or to radio communication but is applicable to other subchannel transmission schemes.

**Claims**

1. A communication system with reduced power variation wherein data is transmitted over a plurality of subchannels including  
5       at least one means of generating information symbols,  
          at least one encoder for encoding information symbols into higher order channel symbols at substantially the same symbol rate, the encoding both being in response to a forward error correction scheme and including selection between redundant symbol values to reduce power variation of the  
10       combined signal, and  
          a subchannel transmitter for transmission of channel symbols on individual subchannels in a combined signal.
2. A communication system with reduced power variation wherein data  
15       is transmitted over a plurality of subchannels further including  
          a subchannel receiver receiving the higher order channel symbols and regenerating the information symbols.
3. A communication system with reduced power variation as claimed in claim 1 or 2 wherein the encoding of information symbols into higher order  
20       channel symbols is done independently for each subchannel.
4. A communication system with reduced power variation as claimed in claim 1 or 2 wherein the forward error correcting scheme operates on a  
25       plurality of the subchannels.
5. A communication system with reduced power variation as claimed in any preceding claim wherein the forward error correcting scheme is a trellis coding scheme.
- 30   6. A communication system with reduced power variation as claimed in any of the preceding claims 1 to 5 wherein BPSK information symbols are encoded into 8PSK channel symbols.

7. A communication system with reduced power variation as claimed in any of the preceding claims 1 to 5 wherein QPSK information symbols are encoded into 16 QAM channel symbols.
- 5 8. A communication system with reduced power variation as claimed in any of the preceding claims wherein the encoder comprises a first data input for the information symbols and at least a second data input for compensation data, the communication system further comprising means for generating compensation data reducing the amplitude variations of the  
10 combined signal.
9. A communication system with reduced power variation as claimed in claim 8 wherein the encoder determines the channel symbols in response to the combination of the information symbols and compensation data.  
15
10. A communication system with reduced power variation as claimed in claim 8 or 9 wherein the means for generating compensation data comprises a memory unit with pre-calculated compensation data.
- 20 11. A communication system with reduced power variation as claimed in claim 8, 9 or 10 wherein the determination of the compensation data for the current information symbols includes intersymbol interference to or from surrounding symbols.
- 25 12. A communication system with reduced power variation as claimed in any of the claims 8,9,10 or 11 wherein transmission occurs in bursts and the compensation data is determined in response to all information symbols transmitted during a burst.
- 30 13. A communication system with reduced power variation as claimed in claim 8 or 9 wherein the receiver generates estimates of the compensation data and evaluates a transmission quality in response to the estimates of the compensation data.

14. A communication system with reduced power variation as claimed in claim 13 wherein the transmission quality is determined by comparing the estimates of the compensation data with a local replica of the compensation data corresponding to the received information symbols.

5

15. A communication system with reduced power variation as claimed in any preceding claim wherein each subchannel has an associated transmission format and at least one characteristic of the transmission format of the subchannels is different between at least two subchannels.

10

16. A communication system with reduced power variation as claimed in claim 15 wherein the at least one characteristic of the transmission format is chosen from the group of :

- a) the transmitted power,
- 15 b) the order of the information symbols,
- c) the order of the channel symbols, and
- d) the encoding.

20

17. A communication system with reduced power variation as claimed in any preceding claim wherein the encoding is dynamically altered.

25

18. A communication system with reduced power variation as claimed in claim 17 wherein the encoding is dynamically altered in response to the transmit power.

30

19. A communication system with reduced power variation as claimed in claim 17 or 18 wherein the transmission rate of the information symbols is altered.

20. A communication system with reduced power variation as claimed in any preceding claim wherein an Orthogonal Frequency Division Multiplex (OFDM) subchannel communication scheme is employed.



21. A communication system with reduced power variation as claimed in any preceding claim 1 to 19 wherein a multicode Code Division Multiple Access (CDMA) subchannel communication scheme is employed.

5 22. A communication system with reduced power variation as claimed in any preceding claim characterised by being a cellular communication system.

23. A method of reducing power variation in a communication system  
10 wherein data is transmitted over a plurality of subchannels, the method comprising

generating information symbols,  
transmitting channel symbols on individual subchannels in a  
combined signal,

15 encoding information symbols into higher order channel symbols at substantially the same symbol rate, the encoding both being in response to a forward error correction scheme and including selection between redundant symbol values to reduce power variation of the combined signal, and

20 receiving the higher order channel symbols and regenerating the information symbols.

24. A method of reducing power variation in a communication system as claimed in claim 23 wherein the encoding of information symbols into  
25 higher order channel symbols is done independently for each subchannel.

25. A method of reducing power variation in a communication system as claimed in any preceding claim 23 to 24 wherein the forward error correcting scheme is a trellis coding scheme.

30

26. A method of reducing power variation in a communication system as claimed in any of the preceding claims 23 to 25 wherein QPSK information symbols are encoded into 16 QAM channel symbols.

27. A method of reducing power variation in a communication system as claimed in any of the preceding claims 23 to 26 further comprising the step of generating compensation data for reducing the amplitude variations of the combined signal, and wherein the encoding of the channel symbols is in response to the combination of the information symbols and compensation data.

28. A method of reducing power variation in a communication system as claimed in any preceding claim 23 to 27 wherein an Orthogonal Frequency Division Multiplex (OFDM) subchannel communication scheme is employed.

29. A method of reducing power variation in a communication system as claimed in any preceding claim 23 to 27 wherein an multicode Code Division Multiple Access (CDMA) subchannel communication scheme is employed.

30. A method of reducing power variation in a communication system as claimed in any preceding claim 23 to 29 wherein the communication system is a cellular communication system.

31. A communication system with reduced power variation substantially as described hereinabove with reference to the accompanying drawings.

32. A method of reducing power variation in a communication system, the method being substantially as described hereinabove with reference to the accompanying drawings.

## COMMUNICATION SYSTEM WITH REDUCED POWER VARIATION AND METHOD THEREFOR

### Abstract of the Disclosure

5

The invention relates to a communication system employing subchannel communication such as OFDM or multicode CDMA. A significant disadvantage of subchannel communication is the power variation of the transmitted signal. The invention provides a system and method with reduced power variation without compromising performance or increasing transmission bandwidth. According to the invention the information symbols to be transmitted on the individual subchannel are fed to encoders (809-815) which maps the information symbols into channel symbols by increasing the order of the symbols. The encoding is both in response to a forward error correction scheme and includes selection between redundant symbol values to reduce power variation of the combined signal. The channel symbols are fed to a modulator (309) and the modulated signal is transmitted. preferably the encoder comprises a trellis coder jointly encoding the information symbols and compensation data set to reduce the power level variation.

10


15

20

FIG. 8 to accompany the Abstract

**THIS PAGE BLANK (USPTO)**

**BEST AVAILABLE COPY**

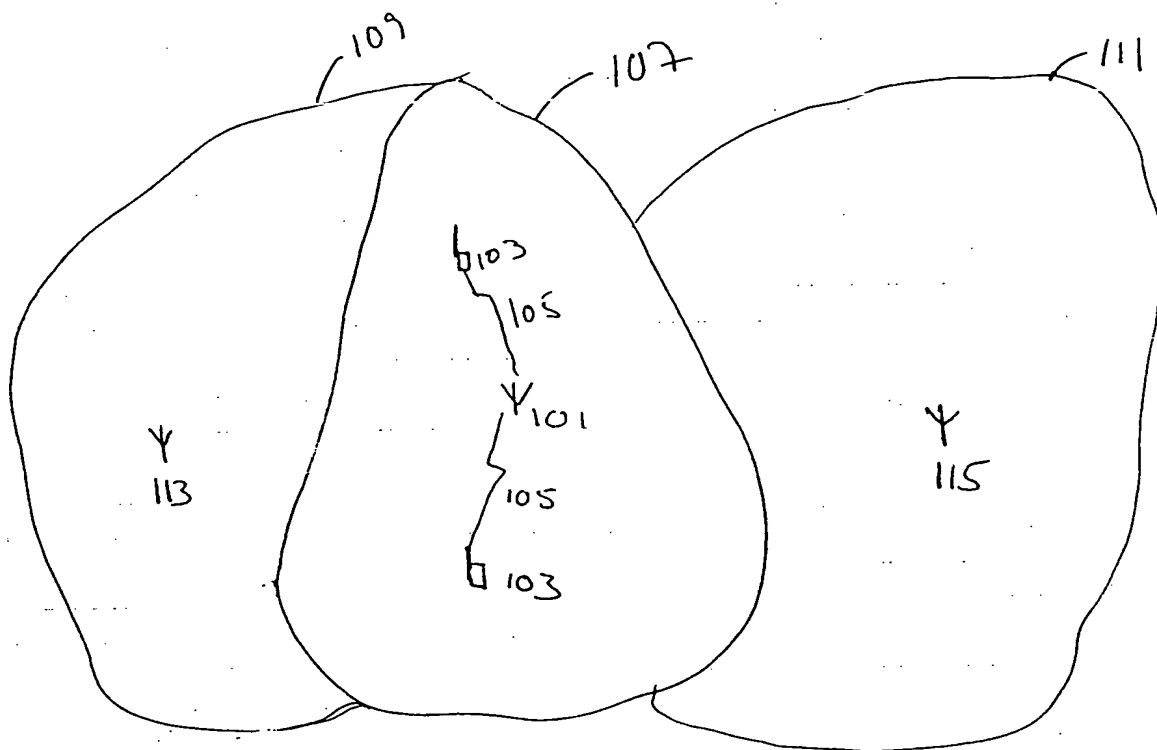

100

Prior Art

Fig. 1.

**THIS PAGE BLANK (USPTO)**  
**BEST AVAILABLE COPY**

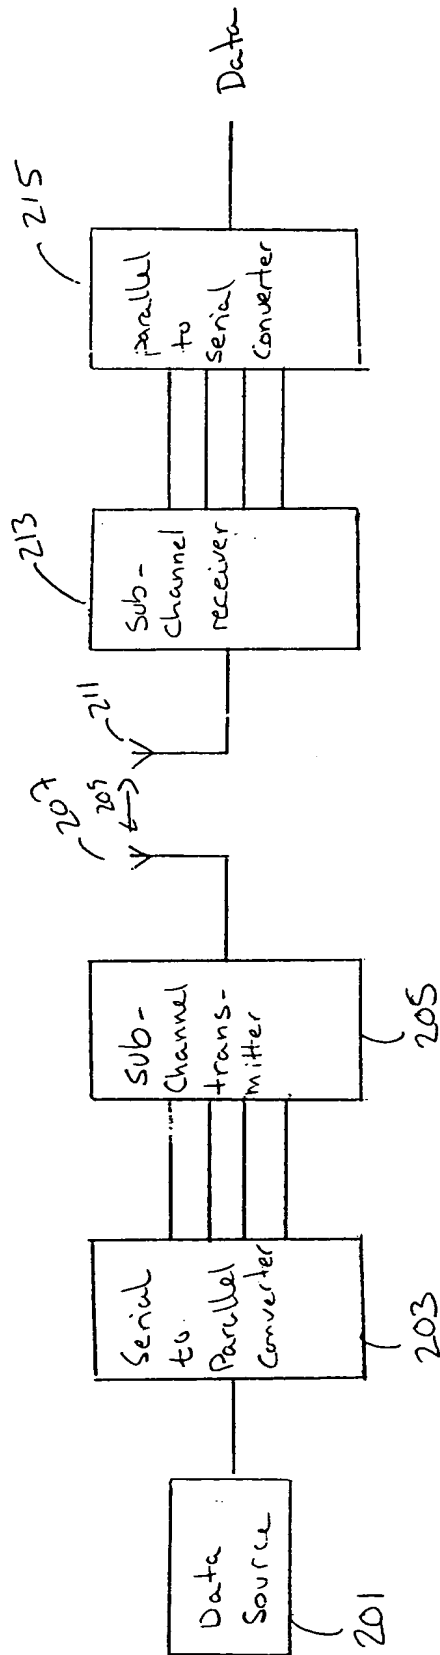


Fig. 2.

BEST AVAILABLE COPY  
THIS PAGE BLANK (USPTO)



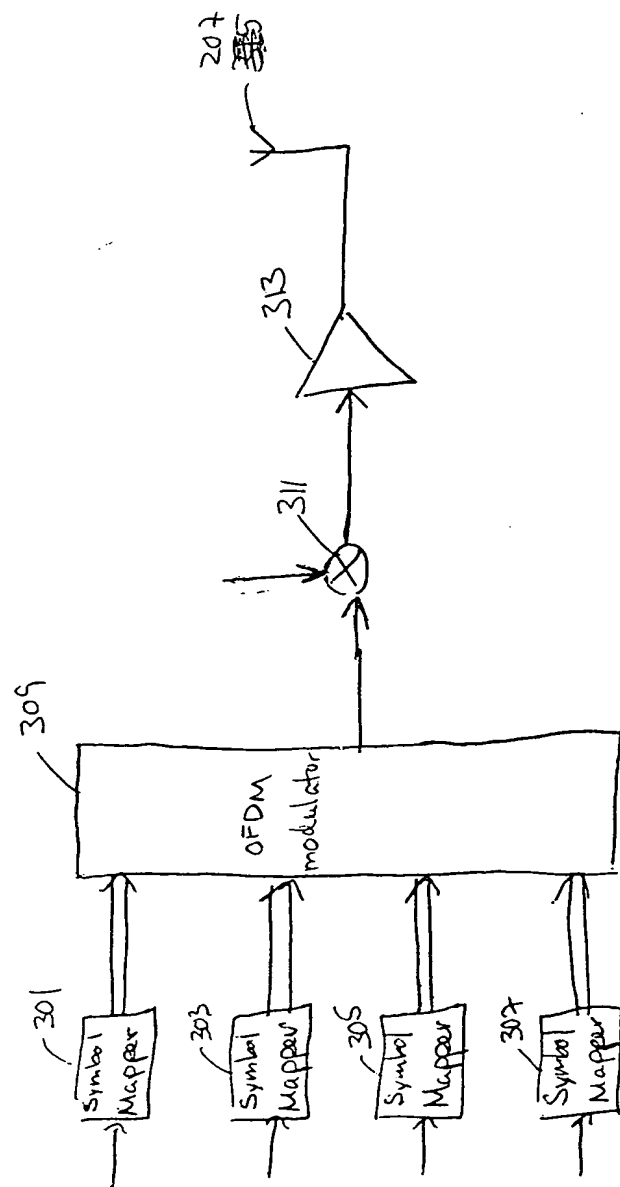


FIG 3

300

**THIS PAGE BLANK (USPTO)**  
**BEST AVAILABLE COPY**

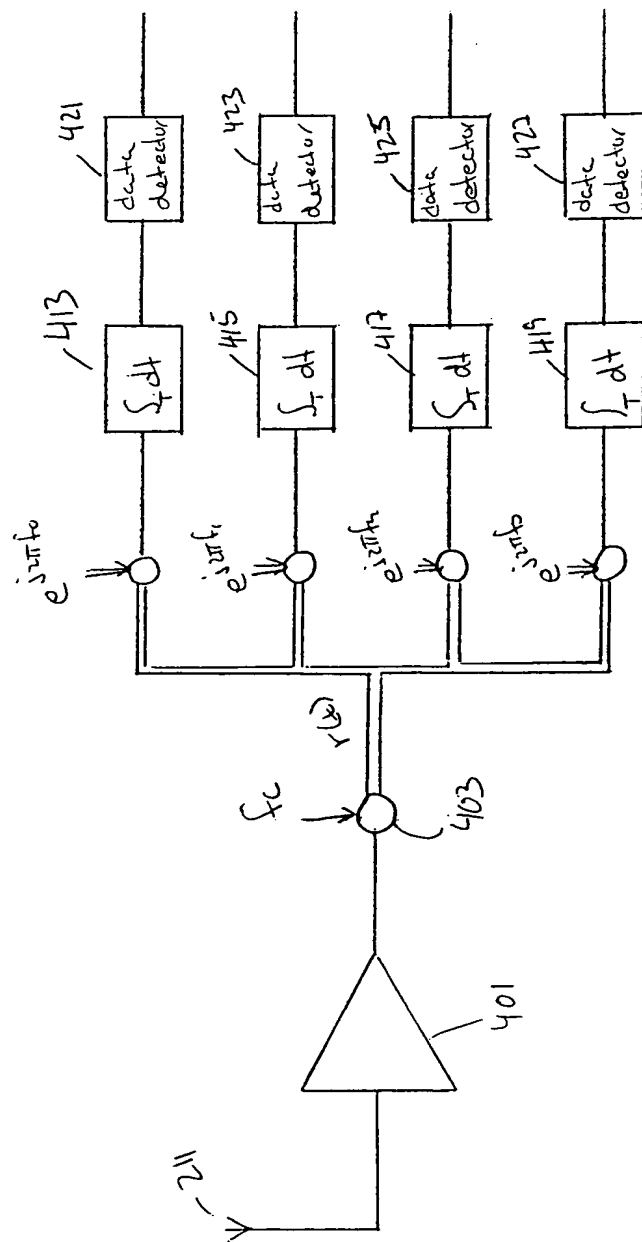


FIG. 4

**THIS PAGE BLANK (USPTO)**  
**BEST AVAILABLE COPY**

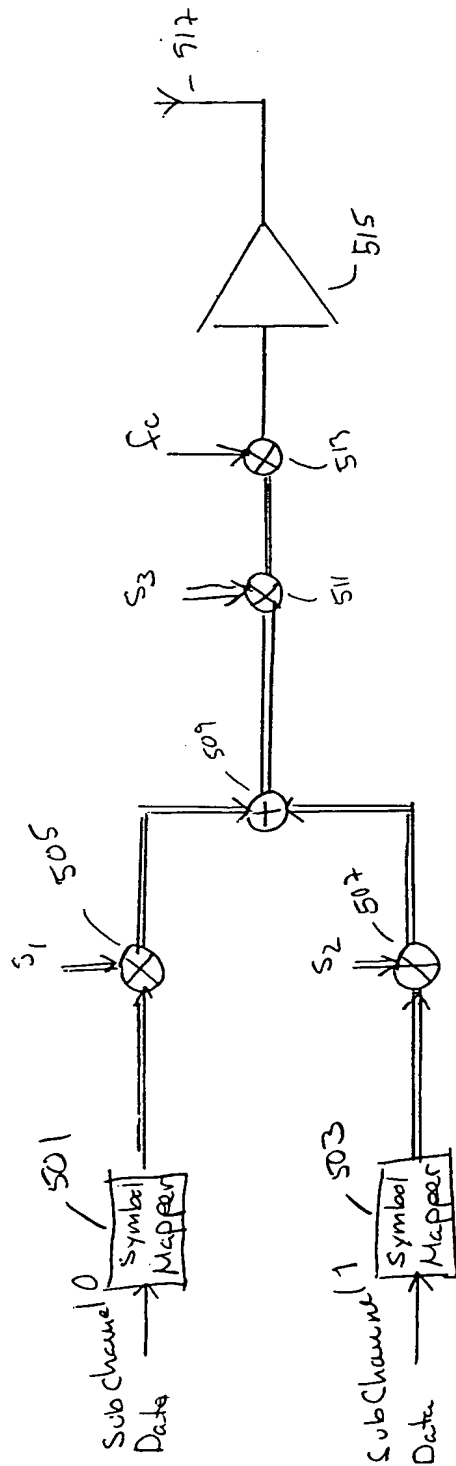


FIG. 5

500

**THIS PAGE BLANK (USPTO)**  
**BEST AVAILABLE COPY**


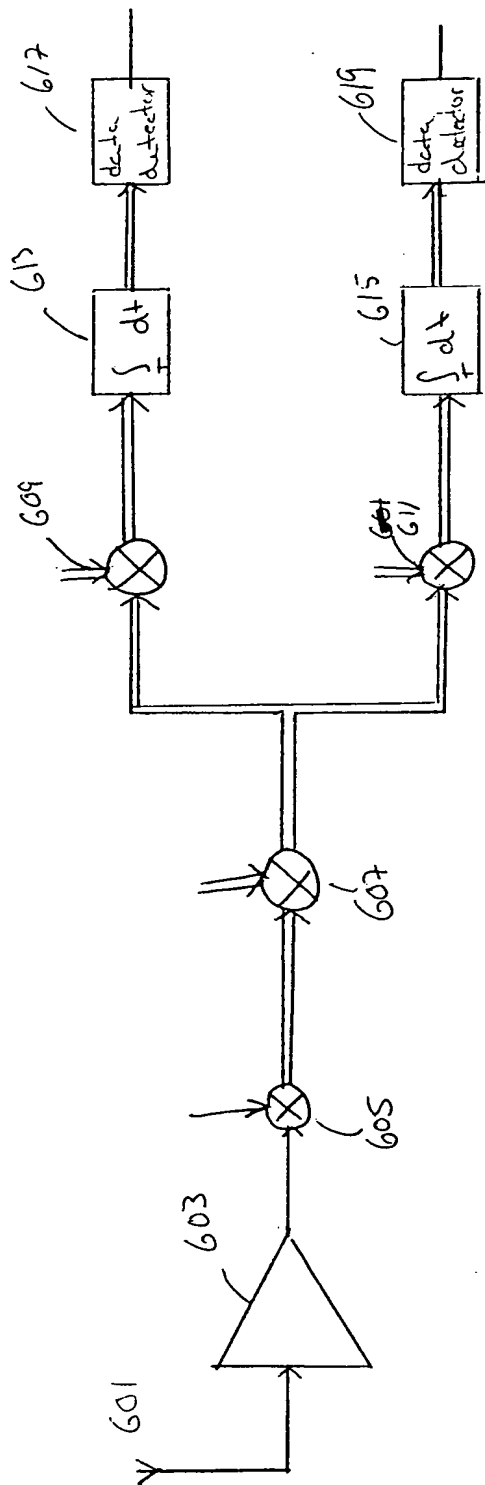


FIG 6


600

**THIS PAGE BLANK (USPTO)**  
**BEST AVAILABLE COPY**



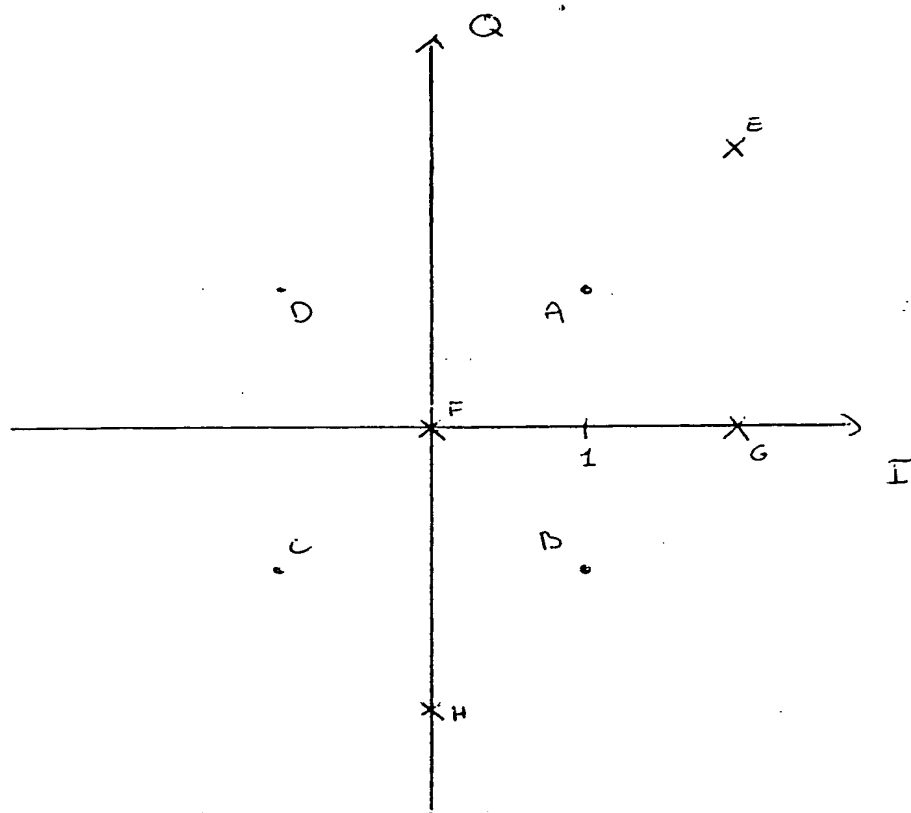


(a)

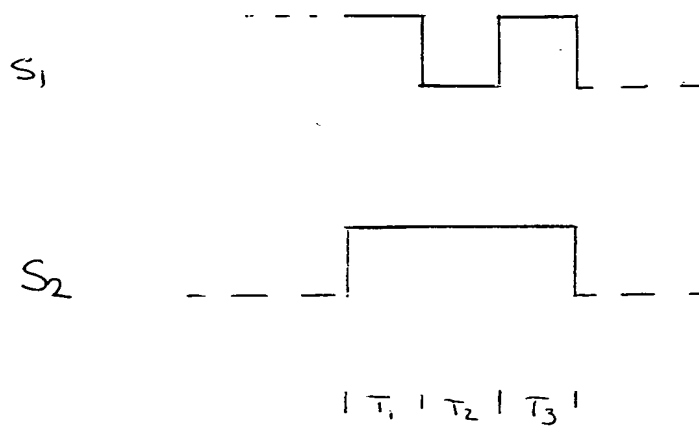

(b)

Fig. 7

THIS PAGE BLANK (USPTO)  
THIS PAGE BLANK COPY


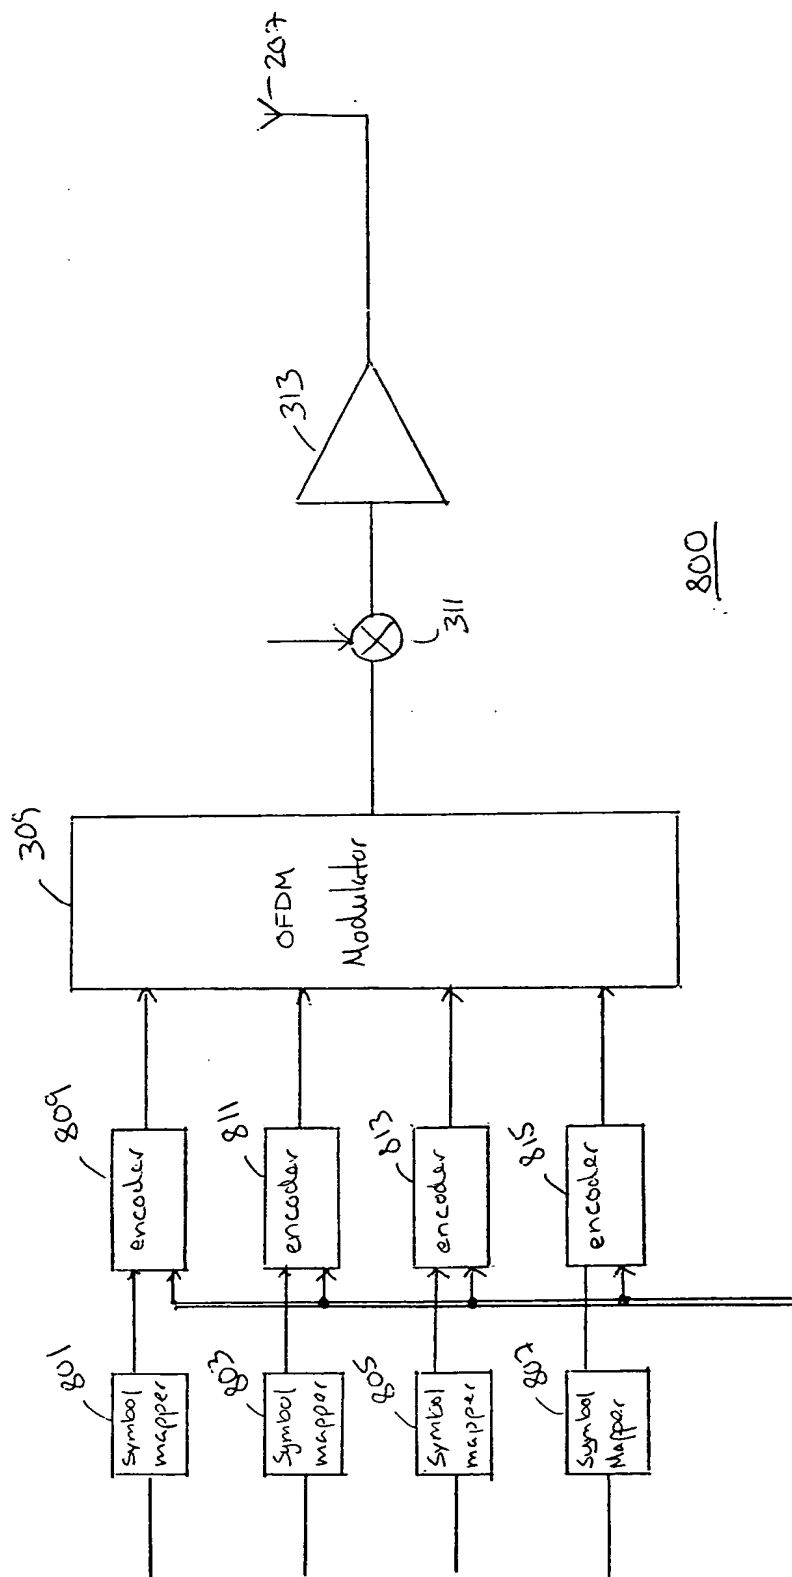


800

Compensation Data

FIG. 8

**THIS PAGE BLANK (USPTO)**  
**BEST AVAILABLE COPY**

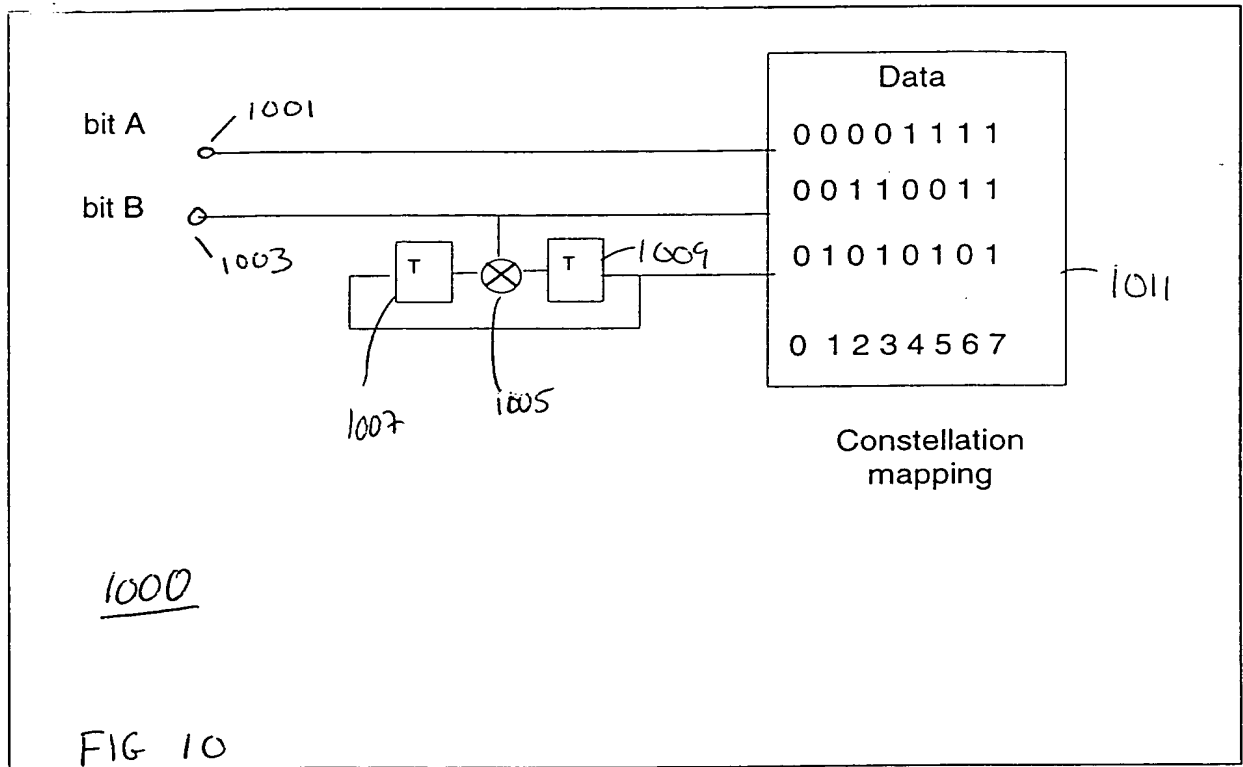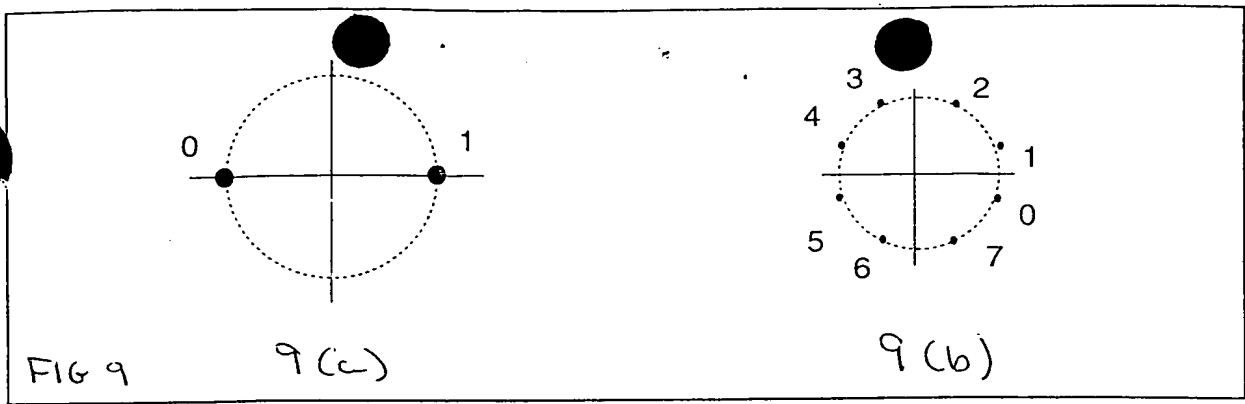

BEST AVAILABLE COPY  
THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**  
**BEST AVAILABLE COPY**